



QUICK START GUIDE

ZBRG ETHERNET BRIDGE

PACKAGE CONTENTS

- 1: PDQ Smart Ethernet Bridge
- 2: Ethernet Cable (1 Meter long)
- 3: BLE Antenna
- 4: Power Supply 5V@1A
- 5: Quick Start Guide




Paste your
Product Label here

PRODUCT LABEL

PREREQUISITES

- 1: Active PDQ Smart Server Account - <https://portal.pdqlocks.com>
- 2: Install PDQ Smart App on Smartphone
- 3: Add at least 1 PDQ Smart Lock to account

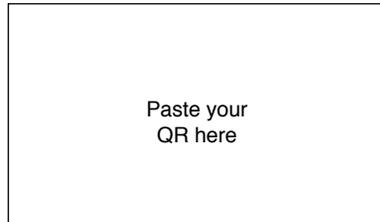


Paste your
QR here

QR CODE

LED INDICATIONS:

EVENT	RED	WHITE	BLUE
Power On	Blink for 3 times	Blink for 3 times	Blink for 3 times
Bluetooth Connection	—	—	Blinking
Connected with PDQ Smart Server	OFF	OFF	OFF
Remote operation request is in process	—	Blinking	—
Remote operation completed	—	Solid for 3 Sec	—
Ethernet Cable is unplugged	Solid	—	Solid
IP Address is not assigned	—	—	Solid
Bridge is not registered with PDQ Smart Server	Blinking	—	Solid
Cannot communicate with PDQ Smart Server	Blinking	—	—

1 PLUG IN & POWER UP

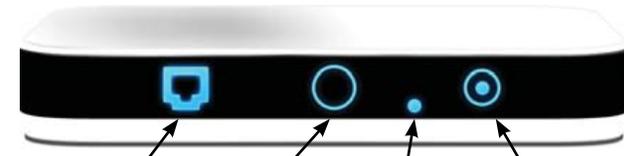

ETHERNET PORT BLE ANTENNA SOCKET FACTORY RESET POWER JACK



1

Screw BLE antenna into BLE Antenna Socket. Align to upright position




2

Plug Ethernet cable from router into Ethernet Port



3

Plug power cord into Power Jack and power outlet



4

Verify the green LED is ON, see the LED chart this page for if any other light blinks or remains solid.



QUICK START GUIDE

ZBRG ETHERNET BRIDGE

2 REGISTER PDQ SMART ETHERNET BRIDGE TO PDQ SERVER



1
Launch PDQ Smart App on Smartphone.
Tap **Device**

2
Tap drop down menu. Tap **Add SR Device**

3
Tap **SCAN QR CODE** and scan code.

*QR code is located on back of SR Ethernet bridge and front of this guide

4
Enter user-friendly device name and device location.
Tap **Choose Existing Account**.



5
Enter credentials and tap **Validate Details**

6
Tap **Register SR Device**

7
Once registration is complete, the SR Bridge home screen will appear.

Wait 60 seconds for configuration to complete.

8
List of all connected PDQ Smart Locks and their status on Network appears

For product support go to: <https://www.pdqlocks.com/about-pdq-smart/>

Contact us at support@pdqlocks.com or Customer Service at 800.441.9692

Headquarters: 2754 Creek Hill Road • Leola, PA 17540 • 800.441.9692 • 717.656.6892 Fax

Regional Distribution Centers: Kansas City, MO, Salt Lake City, UT, Seattle, WA

